



Volvo IT L70F

Available for
hire.

Short or Long
term use.

Mine Site or
Civil Project.

Contact Jemrok
today.



Volvo IT L70F Capabilities


- Comfortable cab climate with the market's best filter system
- Adjustable steering wheel, seat, armrest*, and lever carrier
- Viscous damping helps to eliminate unwanted noise and vibrations
- Improved all-round visibility increases safety
- Laminated front windshield protects the operator
- Halogen work lights front and rear give good visibility

Volvo IT L70F Dimensions


Tires: 20.5 R25 L2

	Standard boom			Long boom		
	L60F	L70F	L90F	L60F	L70F	L90F
B	5990 mm	6050 mm	6120 mm	6500 mm	6530 mm	6550 mm
C	3000 mm	3000 mm	3000 mm	-	-	-
D	460 mm	460 mm	460 mm	-	-	-
F	3220 mm	3280 mm	3280 mm	-	-	-
G	2130 mm	2130 mm	2130 mm	-	-	-
J	3580 mm	3580 mm	3650 mm	4100 mm	4050 mm	4080 mm
K	3870 mm	3870 mm	3960 mm	4390 mm	4340 mm	4390 mm
O	56 °	56 °	57 °	57 °	52 °	57 °
P _{max}	45 °	46 °	44 °	44 °	45 °	-
R	42 °	42 °	44 °	43 °	44 °	47 °
R ₁ *	47 °	48 °	49 °	50 °	52 °	53 °
S	79 °	68 °	67 °	-	72 °	65 °
T	93 mm	110 mm	110 mm	130 mm	118 mm	116 mm
U	450 mm	450 mm	490 mm	590 mm	590 mm	590 mm
X	1900 mm	1930 mm	1960 mm	-	-	-
Y	2440 mm	2470 mm	2490 mm	-	-	-
Z	3210 mm	3200 mm	3300 mm	3600 mm	3500 mm	3660 mm
a ₁	5340 mm	5350 mm	5370 mm	-	-	-
a ₂	2900 mm	2890 mm	2880 mm	-	-	-
a ₃	±40 °	±40 °	±40 °	-	-	-

* Carry position SAE



Where applicable, specifications and dimensions are according to ISO 7191, SAE J732, ISO 7546, SAE J742, ISO 14397, SAE J818.

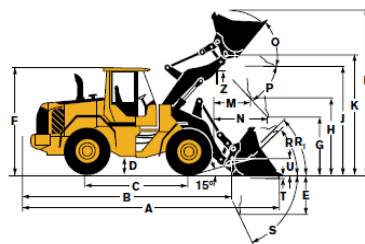

Contact Us

David Cooper

Engineering Manager

ph: 03 6442 2699

m: 0437 100 299

e: david.cooper@jemrok.com.au

Scott St Clair

Operations Manager

ph: 03 6442 2699

m: 0439 321 738

e: scott@jemrok.com.au